

ALPHAfon - HB.A

HIGHWAY ALUMINUM NOISE BARRIER

APPLICATIONS

Highway noise metal barrier **ALPHAfon-HB.A** is a highly efficient Acoustic Reflection (Air-born noise insulation) and sound absorptive solution for noise control in highways or other roads, railways and other mechanical noise sources.


DESCRIPTION

The highway noise barrier **ALPHAfon-HB.A** is perforated aluminum sheet at the noise source side and aluminum sheet at the external side.

The top and the bottom side of the barrier are properly formed (projection - cavity) in order to achieve perfect sound sealing but also to improve its bending strength. Internally it is filled with sound-absorbing material, mineral wool, water repellent, with appropriate density and covered with thin protective glasswool cloth.

The metal noise barrier has great durability against time and ultraviolet radiation. It is water repellent, consists of incombustible materials and it can be easily replaced if needed.

The standard color in both sides is Ral 9002 but both sides can be painted in any Ral Color to match different project requirements.

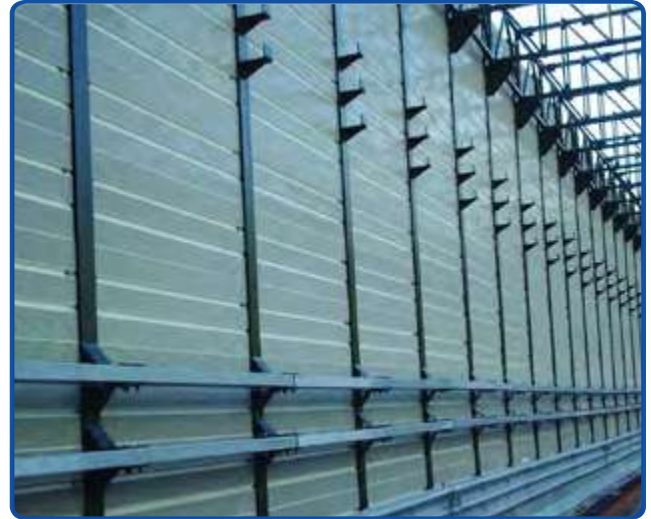

ALPHAfon HB Applications



Standard Version:

Length=2960mm , Height=500mm , Thickness=100mm

The thickness of the panel allows for insertion in HE 140 profile posts

(Compatible with HE 160,180,200 profiles posts with plastic side covering adapters)

INSTALLATION

The highway noise barrier **ALPHAfon-HB.A** is installed by sliding the panels in a HE metal profile pillar according to the structural study (the use of specially designed plastic side covers allows the installation of the panel in different sizes of HE profile posts).

The top and bottom sides of the metal barrier need protection with appropriate metal profile coverings.

Building an appropriate concrete base at the bottom of the barrier is highly recommended.



ALPHAfon HB External Side View



ALPHAfon - HB panels are
CE marked


TECHNICAL CHARACTERISTICS

Characteristics	Measurement Method	Results
Acoustic Reflection (Airborn Sound Insulation)	Assessment Index (EN 1793-2)	$DL_R=25\text{dB}$ Cat.B3
Acoustic Absorption (Sound Absorption)	Assessment Index (EN 1793-1)	$DL_a=20\text{dB}$ Cat.A4
Self Weight	Weight(kN/element) (EN 1794-1 appendix B)	dry= 0,202 / wet= 0,785 / reduced wet= 0,222
Maximum Vertical Load	(EN 1794-1 appendix B.3.2)	Horizontal deformation: 10,0mm load of the structural element 4,45kN/m Vertical deformation : 5,49mm
Maximum Normal Load	(EN 1794-1 appendix A)	Positive result - project load equal to 1,5 kN/m ²
Hazard of Falling Debris	(EN 1794-2 appendix B)	CLASS 3
Light Reflection	Average GU measure with angle 20/60/85° (EN 1794-2 appendix E)	Drilled side 83,2 / 148,5 / 42,2 Undrilled side 285,0 / 476,1 / 11,4

ALPHAfon - HB.A

HIGHWAY METAL NOISE BARRIER

Side Covering Adapters



158
For HE180




113
For HE140

DIMENSIONS		
1	Base Module (mm)	L=2960mm H=500mm s=100mm The panel can be made with custom L(Length)
2	Type of Insertion	The thickness of the panel allows for installation with pillar profiles HE 140 (compatible with HE 160,180,200 using appropriate plastic side covering adaptors)
COMPONENTS		
3	Front Element	Front element (absorptive side facing the noise source) Made of Aluminum sheet, thickness of 1.2mm, perforated with hole diameter 7mm and pitch 10mm (45% perforation) Painted with polyester powder, RAL colours available
4	Back Element	Back Element (facing the noise receptor) Made of Aluminum sheet, thickness of 1.2mm, non perforated Painted with polyester powder, RAL colours available
5	Absorptive/ Reflective	Mineral Wool Panel, thickness of 60mm with 90kg/m ³ minimum density Positioned inside the panel with special housing
6	Side Covering	Prevent direct contact of the panel and the HE profile by using appropriate adapter size Made of plastic Gurantees the hermetic sealing of the noise barrier

Front View

Section A-A

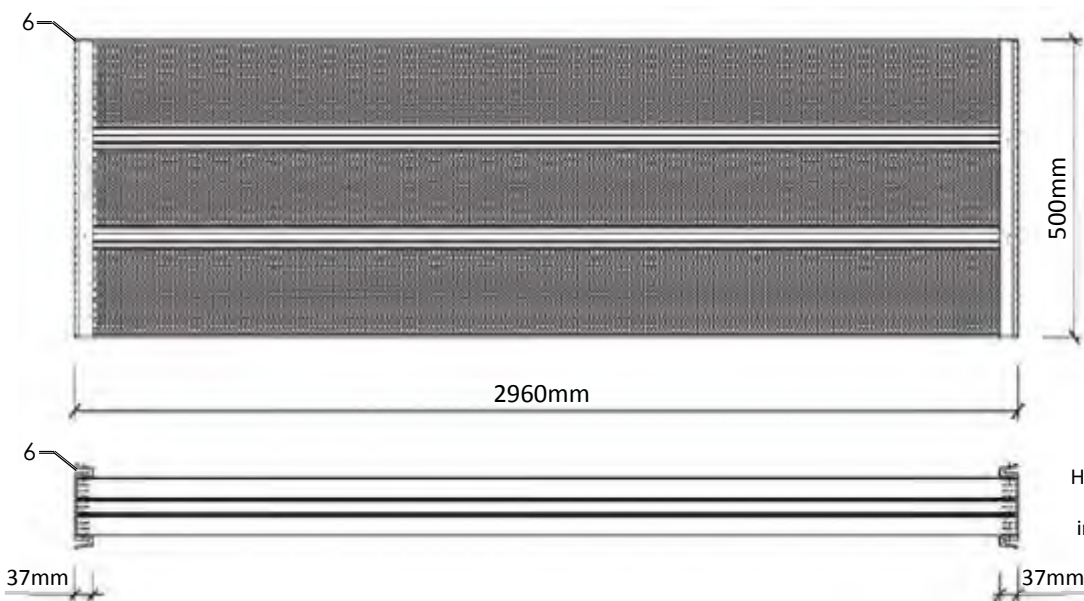

Highway Metal Noise Barrier with side covering plastic adapter for installation with HE 160 pillar profiles